




FCS-5051 Version: 2

Fixed IP Network Camera, 2-Megapixel, 802.3af PoE, IR LEDs, Indoor/Outdoor

The LevelOne FCS-5051 is the perfect solution for day/night surveillance projects such as school campuses, railways stations, and parking lot. It features a 2-megapixel bullet network camera with IP66 weatherproof outdoor housing and infrared LEDs (25m). With the assistance of 3DNR (3-Dimension Noise Reduction) and WDR (Wide Dynamic Range), the network camera offers crystal clear image each and every time. It also equipped with a BNC connector for camera to be connected directly to an analog monitor, IR-cut filter, a built-in Micro SD/SDHC card, 10 motion detection zones and also offers a flexible installation with its triple power support (12 VDC/24 VAC/PoE) and mounting bracket. The FCS-5051 is indisputably the top choice for reliable and high performance surveillance.

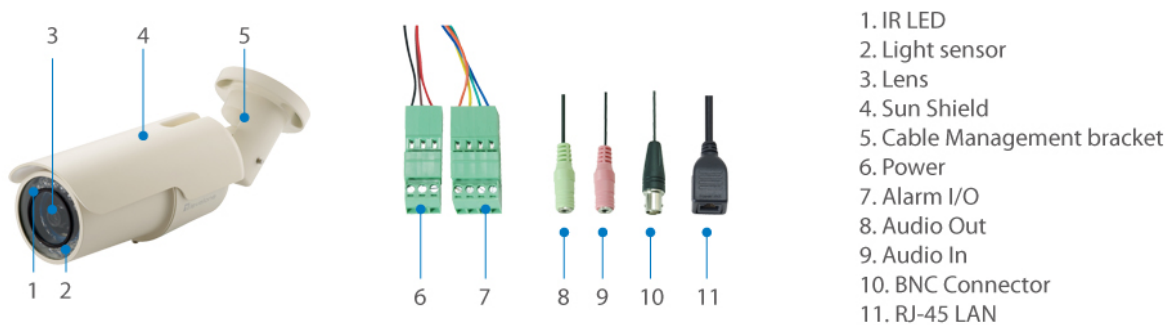

Key Features

- 2-Megapixel (1920 x 1080) high-definition resolution
- Video compression: H.264, MJPEG
- Built-in infrared LEDs for night viewing up to 25m
- Weatherproof IP66-rated housing
- IEEE 802.3af PoE compliant to simplify deployment and installation
- Features WDR (Wide Dynamic Range) to enhance visibility under extremely bright or dark environments
- Features 3DNR (3-Dimension Noise Reduction) to produce extremely clear picture quality even under low light condition
- Built-in Micro SD/SDHC card slot for local storage
- Digital input/output (1DI/1DO) for sensor and alarm
- BNC connector for analog video output
- Triple power support: 12V DC/24V AC/PoE (IEEE 802.3af)
- Free 64-channel monitoring software included (supports iCamSecure App)



Highlight

Exceptional Image Quality

With built-in 3DNR (3-Dimension Noise Reduction) and WDR (Wide Dynamic Range) technology, the camera is able to filter the intense backlight surrounding a subject and remove noises from video signal. The result is that an extremely clear and exquisite picture quality can be produced even under any challenging lighting conditions.

Free bundled 64-channel Management Software

We aim to offer you the most versatile and comprehensive surveillance solutions. Our free IP CamSecure software coming allows you to monitor up to 64 IP cameras simultaneously on one screen to enhance scalability. For added convenience and flexibility, the software includes various advanced features such as scheduling recording, event alert, and heaps more. In addition, simply install our free iCamSecure App to your smartphone and connect to the PC with IP CamSecure software installed, you will easily turn your iPhone/Android smartphone into a portable surveillance system for real-time monitoring and snapshot.

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS

Image Sensor:

2-Megapixel 1/2.7" Progressive Scan CMOS

Lens:

Board lens, Fixed-focal, f=3.6mm, F1.5

Port:

1 x RJ-45 10/100 Mbps PoE port

1 x 3.5mm line out

1 x 3.5mm mic/line in

1 x Power terminal block

1 x BNC analog video output

I/O terminal block (4 DI/1 DO)

1 x MicroSDHC card slot

Button/Knob:

Reset Button

Indicator:

Link/ Act

IR Cut Filter:

Removable infrared-cut filter for day & night function

IR LED:

23 IR LEDs for illumination up to 25m

Shutter Time:

1~ 1/10,000 sec.

Angle of View:

87.6°

Pan/Tilt/Zoom:

8x digital zoom

Video Format:

H.264 / MJPEG

Resolution:

2M (1920x1080)

Output Video Format:

AVI

Audio Compression:

G.711 / G.726

Power Input:

DC12V / AC24V / 802.3af PoE

Power Consumption:

9W

Data Rate:

10/100Mbps

Storage Capacity:

SD/MicroSD memory card of up to 16GB

Operating Temperature (°C):

Operating: -10°C ~ 50°C

Operating Humidity (Non-condensing):

Operating: 10% ~ 90%

Mount:

Cable Management Bracket for Wall/Ceiling Mount

Features

General:

Backup: MicroSDHC card slot for local storage

IPv6: IPv4/IPv6 network operation

Security:

Alarm and Notification: Alarm: Motion Detection; Tampering Detection; Network Failure Detection; DI/DO

Notification: HTTP, FTP, SMTP

Access Control: Multi-level user access with password protection

IP address filtering

IEEE 802.1X network access control

HTTPS encrypted data transmission

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Back Light Compensation (BLC)

- Wide Dynamic Range (WDR)

- 3D Noise Reduction (3DNR)

- Flip & Mirror

- Portrait Mode

- Privacy Mask

- Time Stamp and Text Caption Overlay

Image Layout:

Streaming: Up to 4 video streams

Motion Detection: 10 Detection Zones

Audio:

Streaming: 2-way audio

Input/Output: Mic/line input, line output



Performance

Number of Clients:

20

Frame Rate (fps):

15 fps at 1920x1080; 30 fps at 1280x1024

Minimum illumination:

Color: 0.2 lux at F1.5

B/W: 0.02 lux at F1.5

Physical Specifications

Dimensions (W x D x H mm):

90 x 195 x 90 mm

Weight (g):

940 g

Approval and Compliance

EMI/EMS:

CE, RoHS, FCC, Onvif

Environmental Test:

Weather proof IP66-rated housing

Others

Operation Systems:

Microsoft Windows 8/7/Vista/XP

Supported Browsers:


Browser: Internet Explorer 6.x or above, Firefox, Chrome, Safari

Cell phone: 3GPP player

Real Player: 10.5 or above

Quick Time 6.5 or above

Diagram

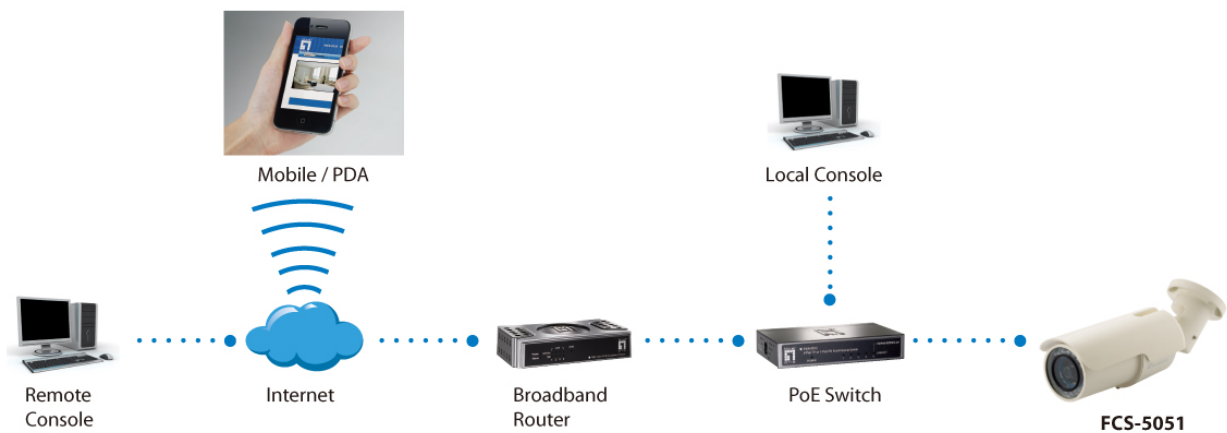

Order Information

Package Contents

FCS-5051
Power Terminal Block
Sun Shield
Wall Mount Kit
Quick Installation Guide
Resource CD (User Manual, Utility, 64-CH Monitoring Software)

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.