



FCS-5059 Version: 1

Cámara de red IP fijas, 2-Megapixel, indicadores LED IR, two-way audio, 802.3af PoE, Exteriores, Varifocal Lens

El dispositivo LevelOne FCS-5059 es una cámara para exteriores de posición fija que ofrece una solución económica y ultrafiable para redes de vigilancia IP al aire libre. Posee el grado de protección IP66, que la permite funcionar en condiciones de lluvia, calor extremo, nieve, polvo y humedad. Proporciona imágenes claras y nítidas, con una resolución de 2 megapíxeles, y la versatilidad del estándar PoE 802.3af que la permite transferir alimentación y datos a través de un solo cable Cat.5; por ello, la cámara LevelOne FCS-5059 debería ser una parte esencial de cualquier implementación de seguridad que requiera cámaras inteligentes y fiables para exteriores.

Key Features

- Carcasa con grado de protección IP66 contra meteorología adversa
- Resolución de alta definición de 2 megapíxeles (1920 x 1080)
- Compresión de vídeo: H.264/MJPEG
- Incluye WDR (Rango dinámico amplio) para mejorar la visibilidad en entornos extremadamente luminosos u oscuros
- LED infrarrojos integrados para visualización nocturna hasta 30 m
- Entrada/salida digital (1 ed/1 sd) para el sensor y la alarma
- Compatibilidad de alimentación: PoE (IEEE 802.3af)
-
- Distancia varifocal ajustable entre 2,8 y 12 mm para permitir la vigilancia en modo panorámico
- Soporta detección de movimiento (Intrusión/manupulación de la cámara/cruce de línea) y notificación de eventos

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, Unicast

Image Sensor:

1/2.8" Progressive Scan CMOS

Connectors and Cabling:

Power connector

10/100Mbps RJ45 Ethernet interface

1Vp-p composite output (75 Ω/BNC)

I/O terminal block (1 DI/1 DO)

**Button/Knob:**

Reset button

Lens:

2.8 - 12 mm @ F1.4, CS-Mount lens socket, Auto Iris

IR Cut Filter:

Yes

IR LED:

IR LEDs for illumination up to 30m

Shutter Time:

1/3s ~ 1/10,000s

Angle of View:

106°~35°

Video Compression:

H.264/MJPEG/H.264+

Resolution:

2-Megapixel(1920 x 1080)

Video Format:

AVI

Audio Compression:

G.711/G.722.1/G.726/MP2L2

Power Input:

PoE (IEEE 802.3af)

12V DC±10%

Power Consumption:

Max.5.5W(Max. 7.5 W with IR cut filter on)

Features

PoE:

PoE (IEEE 802.3af)

Security:

One-key reset, flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, anonymous access

Video:**Image Setting:**

- Adjustable image size, quality and bit rate
- Configurable brightness, sharpness, contrast, saturation, white balance and exposure
- AGC/AWB/AES
- Back Light Compensation (BLC)
- Wide Dynamic Range (WDR)120dB
- 3D Noise Reduction (3DNR)
- Flip & Mirror
- Rotate Mode
- Portrait Mode
- Privacy Mask
- Automatic Day/Night
- ICR

- Time Stamp and Text Caption Overlay

Image Layout:

Streaming: Up to 2 video streams

Motion Detection: 3 Detection Zones

Audio:

G.711/G.722.1/G.726/MP2L2

64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)

Performance**Number of Clients:**

20

Data Transfer Rate:

10/100Mbps

Storage Capacity:

Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB

Frame Rate (fps):

50Hz: 25fps(1920 × 1080, 1280 × 960, 1280 × 720)

60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)

Minimum illumination:

0.01Lux @(F1.2,AGC ON), 0.014 Lux @(F1.4,AGC ON), 0 Lux with IR

Environment**Temperature (°C):**

-30 °C ~ 60 °C (-22 °F – 140 °F)

Humidity (Non-condensing):

Humidity 95% or less (non-condensing)

Deployment:

Cable Management Bracket for Wall/Ceiling Mount

Physical Specifications**Dimensions (W x D x H mm):**

95×105×258.6 mm (3.74" × 4.13" × 10.18")

Weight (g):

1200

Color:

White

Approval and Compliance**EMI/EMS:**

CE,FCC,UL

Environmental Test:

Weather proof IP66-rated housing

Others:


ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI,ISO-9001 certified factory

Others**Viewing Systems:**

Windows 7/8/10 Internet Explorer 9 or above



Diagrama

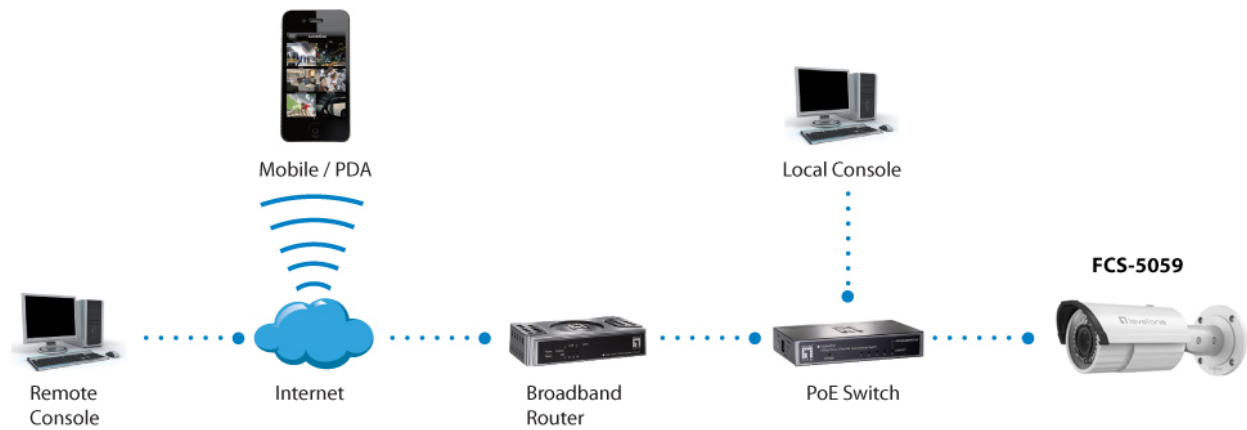

Order Information

FCS-5059

Package Contents

FCS-5059
 Resource CD (User Manual, Utility, 64-CH Monitoring Software)
 Screw Kit

Accesorios



CAS-7303
 Pole Mount Bracket, Clamping Range 2.6"-5"



CAS-7307
 Corner Mount Bracket



CAS-7311
 Junction box for Bullet Camera



CAS-7312
 Power Intake Box for Bullet Camera

No liability or responsibility for any errors or omissions in the content.
 Specifications are subject to change without notice.
 All mentioned brand names are registered trademarks and property of their owners.
 Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.