

GEP-2672 Version: 1




Switch Gigabit PoE L2 de 26 puertos, 802.3af/at PoE, 24 Puertos PoE, 4 x SFP/RJ45 Combo, 2 x SFP, 370W

The LevelOne GEP-2672 is a Layer 2 Managed switch with 24 x 1000Base-T PoE-Plus ports associated with 4 x Gigabit SFP (Small Form Factor Pluggable) slots + 2 individual Gigabit SFP Slots. This switch is IEEE 802.3af/at compliant to provide power and data over a single Ethernet cable to the PoE device, with total power budget of 370W, up to 30W per port.

Despite its affordable pricing, the GEP-2672 is equipped with advanced features such as Single IP Management which allows users to manage up to 32 switches under the same web interface, Easy Configuration Port (ECP), IPv6, IEEE 802.1D/w/s Spanning Tree, IEEE 802.1X Access Control of up to 256 entries for easy network security, auto port aggregation, IEEE 802.1p QoS with 8 priority queues, IEEE 802.3az Green Ethernet and more.

An ideal network solution for workgroups and edge deployments, or anyone looking for an affordable and efficient way to expand their network.

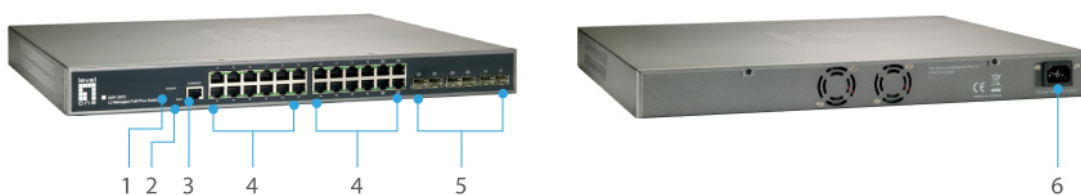

1. LED Indicators
2. Reset Button
3. RS-232 Port

4. 10/100/1000Mbps RJ-45 PoE Ports
5. 100/1000Base SFP Slots
6. Power Socket

Key Features

- 24 puertos PoE Gigabit con 4 ranuras SFP compartidas y 2 ranuras SFP Gigabit
- Transmisión y recepción a 10/100/1000 Mbps a velocidad de cable
- Conforme con IEEE 802.3af / at PoE para simplificar la implementación y la instalación
- Puerto de configuración sencilla (ECP) para facilitar la implementación de dispositivos de red, como por ejemplo teléfonos IP o cámara de red
- La gestión de IP sencilla admite hasta 32 conmutadores (GEL-1072/GTL-2880/GTP-2880/GTL-5280GEP-2671/GEP-2672)
- Filtrado IP Multicast a través de indagación IGMP V1/ V2/ V3
- QoS IEEE 802.1p con 8 colas de prioridad
- Autenticación basada en puerto IEEE 802.1X con Lista de control de acceso (ACL) de hasta 256 entradas para



- facilitar la seguridad de la red
- Soporta IPv4/IPv6
- IEEE 802.1d/w/s Spanning Tree Protocol (STP) y duplicación de puertos
- La VLAN Tag-based 802.1Q permite segmentación de la red para mejorar el rendimiento y la seguridad
- Admite imagen de firmware dual, que protege de actualizaciones de firmware fallidas
- Capacidad de alimentación PoE total: 370 W, hasta 30 W por puerto
- Minimice la huella de carbono gracias a la tecnología avanzada de uso eficiente de la electricidad (IEEE 802.3az)
- IEEE 802.3ad LACP para puerto automático

Highlight

IP Clustered Stacking Solution

With the design and implementation of SIP (Single IP Management), network administrators are allowed to virtually stack up to 32 switches (GEL-1072/GTL-2880/GTP-2880/GTL-5280/GEP-2671/GEP-2672) together and manage them as one logical unit through a single IP address regardless of geographical locations of those switches. Comparing to traditional stacking, IP clustering eliminates the use of costly cables and connectors. Furthermore, it minimizes the impact of any single point of failure.

LevelOne Easy Configuration Port (ECP) Technology

Each switch port can now be fully optimized through a predefined role and settings which are based on the type of a device such as an IP camera or a VoIP phone to be connected to. For instance, even if a surveillance system integrator who lacks of IT administration skills, can still easily enables the role and applies settings like VLAN, QoS, port security and spanning tree to all connected IP cameras on a single Web UI within a few minutes. Hence, simplifying network deployment and ensuring consistent configurations across the network.

Specifications

System Specifications

Standards & Protocols:

- IEEE 802.3 10-BASE-T, Ethernet
- IEEE 802.3u 100-BASE-TX, Fast Ethernet
- IEEE 802.3ab 1000BASE-T, Gigabit Ethernet
- IEEE 802.3z 1000BASE-X, Gigabit Ethernet
- IEEE 802.1p Quality of Service (QoS)
- IEEE 802.1X Port-based Network Access Control (PNAC)
- IEEE 802.1Q Virtual LANs (VLANs)
- IEEE 802.1D MAC Bridges
- IEEE 802.1d Standard Spanning Tree Protocol
- IEEE 802.1s Multiple Spanning Tree (MSTP)
- IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
- IEEE 802.3x Flow Control
- IEEE 802.3ad Link Aggregation Control Protocol (LACP)
- IEEE 802.3af Power over Ethernet (PoE)
- IEEE 802.3at Power over Ethernet Plus (PoE+)
- IEEE 802.3az Energy-Efficient Ethernet
- Link Layer Discovery Protocol (LLDP)
- Universal Plug and Play (UPnP)

Buffer de Memoria:

512KB

Puerto:

- 24x RJ-45 10/100/1000BASE-T PoE-Plus ports
- 6 x 100/1000Base-X SFP Slots (4 shared)

Botón / Perilla:

Reset Button

Indicador:

Power; Link/Active; PoE

Método de transmisión:

Store-and-Forward

Entrada de alimentación:

100-240V AC, 50-60 Hz, Internal Power Supply

El consumo de energía:

< 250W

Plano posterior (Gbps):

52Gbps

Tabla de direcciones MAC:

8K

Velocidad de datos:

10/100/1000Mbps

Ahorro de energía:

IEEE 802.3az Energy Efficient Ethernet:

- Automatically turns power off on RJ-45 port when detecting link down or Idle of client
- Cable length detection: Adjusts the signal strength based on the cable length
- Reduces the power consumption for cables shorter

Temperatura de funcionamiento (° C):

Operating: 0°C ~ 40°C

Storage: -20°C ~ 70°C

Humedad de funcionamiento:

Storage: 10% ~ 90%

Operating: 10 ~ 90%

Instalación:

19-inch rack-mountable

Features

General:

Quality of Service (QoS):

8 hardware Priority Queues per port

Traffic classification based on IEEE 802.1p CoS

IPv4/IPv6 precedence/ type of service (ToS) / DSCP based

Rate Limiting - Ingress policer egress shaping and rate control

Spanning Tree:

Bridge Protocol Data Units (BPDU)

IEEE 802.1D MAC Bridges

IEEE 802.1d Spanning Tree Protocol (STP)

IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)

IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)

Virtual Local Area Network (VLAN):

802.1Q tag-based VLAN - up to 256 VLANs and 4096 VLAN IDs

Port-based VLAN

MAC-based VLAN

DHCP: DHCP Client; DHCP Relay (Layer 2)

IPv6:

IPv6 host mode; IPv6 stateless address auto-configuration; Duplicate Address Detection (DAD)

ICMP v6; IPv6 Neighbor Discovery (MLD)

IGMP:

IGMP v1/v2/v3 snooping; IGMP Queried; IGMP Proxy

IPv6 QoS Prioritize IPv6 packets in hardware

Port Mirroring:

Many-to-One TX/RX

Port Trunking:

IEEE 802.3ad LACP Trunk -Static Trunk up to 25 trunk groups



Características de PoE:

Power Budget: Max. 370W

Power Output: Up to 30W per port

Protection: Circuit protection to prevent power interference between ports

Management: PoE status, PoE on/off scheduling, PoE power delay, PoE live checking, Per port power priority setting

Pin Assignment: 1/2(+), 3/6(-)

Others: PD classification identity

Características de seguridad:

Storm Control:

Prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on a port

Access Control:

SSH v1/v2 supported; HTTPS/SSL; IEEE 802.1X Radius/Tacacs+ authentication; Dynamic VLAN assignment

PVE: L2 isolation between clients in the same VLAN

ACLs: Support for up to 256 entries

Filtering: Port-/MAC-/IP-based security

Características de gestión:

Diagnosis:

Event / Error Log / Syslog

Port:

Easy Configuration Port (ECP) - configure client's QoS and security capabilities

Single IP Management (SIM): Single IP management for a virtual stack function to switches

(GTL-2880/GTL-5280/GTP-2880/GTL-1072/GEP-2672)

Network:

HTTPS/SSL; SSH v1/v2; sFlow; RMON (groups 1, 2, 3 and 9) Management ; SNMP v1, v2c, v3 User-based Security

Model (USM); CLI via console port or Telnet; management VLAN; Private VLAN Edge (PVE)

Performance

Velocidad de reenvío de paquetes:

1000Mbps port - 1,488,000pps

100Mbps port - 148,000pps

10Mbps port - 14,880pps

Jumbo Frame (K):

9KB

Physical Specifications

Dimensiones (W x D x H mm):

442 x 390 x 44 mm

Peso (gramos):

3028g with box, 2274g without box

Reliability

MTBF:


260,136 hrs

Approval and Compliance

EMI/EMS:

FCC Part 15 Class A, CE, RoHS

Diagrama

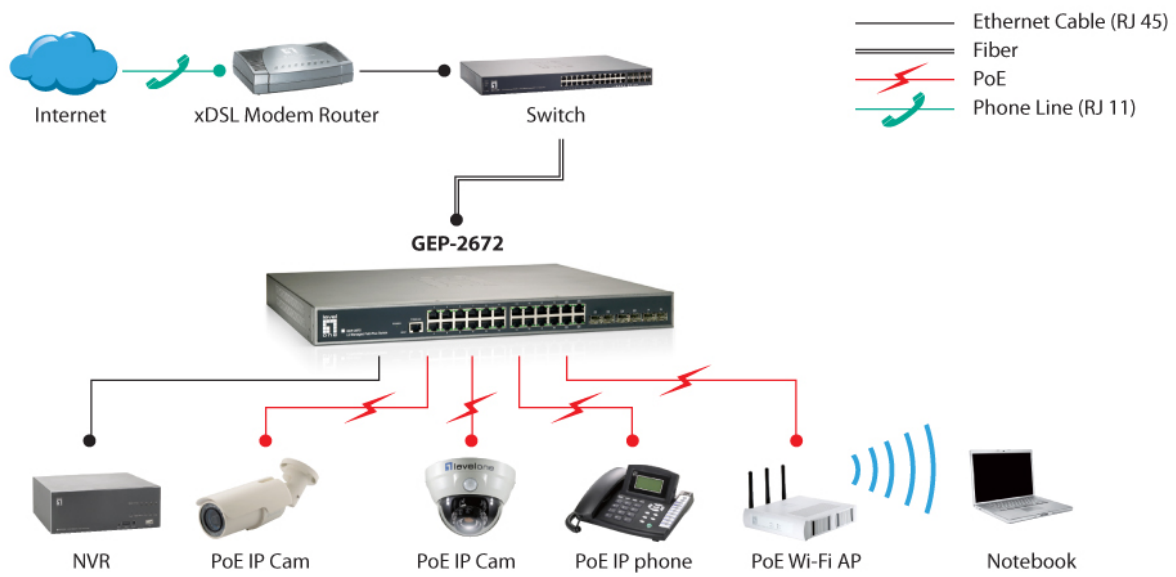

Order Information

Package Contents

GEP-2672
Power Cord
19" Rack Mount Kit
Rubber Feet
Quick Installation Guide
Resource CD (User Manual)

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.