




FCS-3093 Version: 1

Panoramic Dome Network Camera, 5-Megapixel, Outdoor, PoE 802.3af, WDR, Vandalproof, Vibrationproof

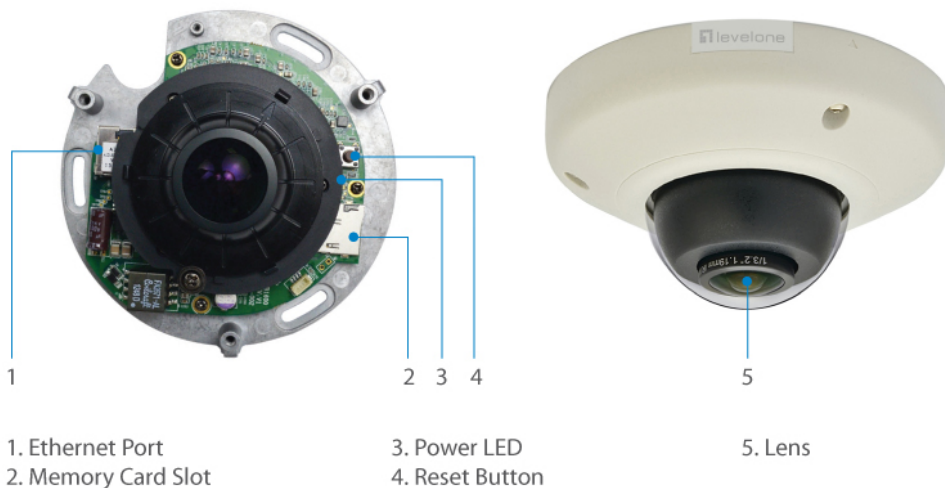

Key Features

- Ranura de tarjetas Micro SDHC/SDXC integrada para el almacenamiento local
- Resolución de alta definición de 5 megapíxeles (2592 x 1944)
- Ofrece varios modos de vídeo de 360°/180° para permitir realizar la vigilancia en modo panorámico
- Grado de protección IP68 contra vandalismo y meteorología adversa con un amplio margen de temperatura de funcionamiento o (-20 °C a 50 °C) para entornos adversos
- Incluye WDR (Rango dinámico amplio) para mejorar la visibilidad en entornos extremadamente luminosos u oscuros
- Carcasa con un índice IK10 a prueba de vándalos
- A prueba de golpes para uso en vehículos móviles
- Compresión: H.264/MJPEG
- Compatibilidad de alimentación: PoE (IEEE 802.3af)
- Software de supervisión de 64 canales gratuito incluido (es compatible con la aplicación OneSecure)

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

IEEE 802.1X Network Access Control

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour

Image Sensor:

5-Megapixel 1/3.2" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE port

1 x Mic in

Modularity:

1 x MicroSDHC/ MicroSDXC card slot

Button:

Reset Button

Indicator:

Power

Lens:

Fixed focal, Fixed iris, Fixed focus, f1.19mm, F2.0

Shutter Time:

1/5 ~ 1/10,000 sec

Angle of View:

180° (overview area), 109.8° (high detail area)

Pan/Tilt/Zoom:

Digital Zoom to very high detail available on Software

Video Compression:

H.264 / MJPEG

Resolution:

2592 x 1944(5M), 2048 x 1536, 640 x 480, 320 x 240

Video Format:

RAW

Audio Compression:

G.711

Power:

Power Consumption: PoE Class 1 (IEEE802.3af) / 2.91 W

Power Input: 802.3af PoE

Features

General:

Backup: MicroSDHC /MicroSDXC card slot for local storage

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Back Light Compensation (BLC)

- Wide Dynamic Range (WDR), Basic WDR (74 dB)

- 2D Noise Reduction (2DNR)

Streaming: Up to 2 video streams

Audio:
Streaming: 1-way audio
Input: Mic in

Performance

Data Transfer Rate:

10/100Mbps

Storage Capacity:

SD/MicroSD memory card of up to 64GB

Frame Rate:

15 fps for all resolutions

Minimum illumination:

Color: 0.1 lux

B/W: 0.05 lux at F2.0

Environment

Temperature (°C):

Operating: -20°C ~ 50°C

Humidity (Non-condensing):

Operating: 10% ~ 85%

Physical Specifications

Dimensions (W x D x H mm):

110 x 58 x 110

Weight (g):

492 g

Enclosure:

Weather proof IP68-rated housing

Vandal proof IK10-rated

Shock proof for rolling stock application

Others

Approval and Compliance:

CE, FCC, ONVIF, IP68, IK10, NEMA 4X, EN50155

Deployment:


Ceiling Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP



Diagrama

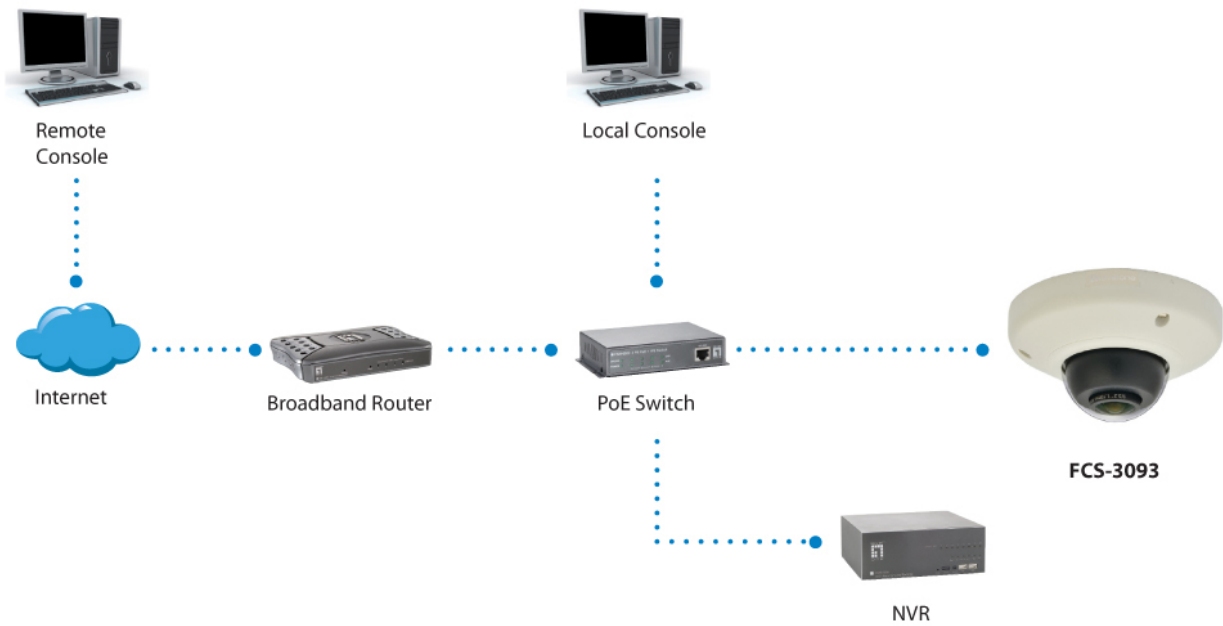

Order Information

FCS-3093

Package Contents

FCS-3093
Mounting Kit
Screw Kit
Quick Installation Guide
Resource CD (User Manual, Utility, QIG)

Accesorios



CAS-2316

Wall mount for mini dome mini fisheye

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.