




FCS-5065 Version: 1

## Zoom Network Camera, 5-Megapixel, Outdoor, PoE 802.3af, Day & Night, IR LEDs, 12x, WDR

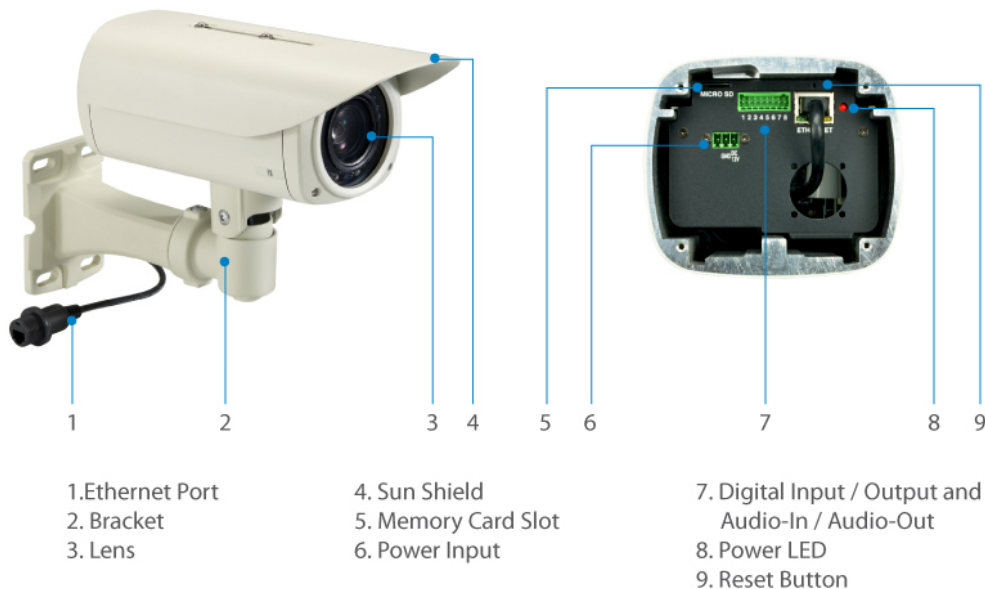

### Key Features

- Ranura de tarjetas Micro SDHC/SDXC integrada para el almacenamiento local
- Resolución de alta definición de 5 megapíxeles (2592 x 1944)
- Calificación IP67 a prueba de agua con una amplia temperatura operativa (-40 °C a 50 °C) para entornos exigentes
- Incluye WDR (Rango dinámico amplio) para mejorar la visibilidad en entornos extremadamente luminosos u oscuros
- Admite zoom óptico 12x
- Carcasa con un índice IK10 a prueba de vándalos
- LED infrarrojos integrados para visualización nocturna hasta 40 m
- Compresión: H.264/MJPEG
- Filtro de corte de infrarrojos extraíble, para permitir la vigilancia de día y de noche
- DOS posibilidades de alimentación: 12VCD/PoE (IEEE 802.3af)
- Software de supervisión de 64 canales gratuito incluido (es compatible con la aplicación OneSecure)



## Specifications

### System Specifications

#### Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour

#### Image Sensor:

5-Megapixel 1/3" Progressive Scan CMOS

#### Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE Port

1 x Line In

1 x Line Out

1 x Power terminal block

I/O terminal block (1 DI/1 DO)

#### Modularity:

1 x MicroSDHC/ MicroSDXC card slot

#### Button:

Reset Button

#### Indicator:

Power

#### Lens:

Zoom, DC iris, Auto focus, f5.2-62.4mm, F1.8-3.0

#### IR Cut Filter:

Removable infrared-cut filter for day & night function

#### IR LED:

27 Adaptive IR LEDs for illumination up to 40m

#### Shutter Time:

1/5 ~ 1/10,000 sec

#### Angle of View:

48.4° ~ 4.8°

#### Pan/Tilt/Zoom:

12x Optical Zoom, Digital Zoom to very high detail available on Software

#### Video Compression:

H.264 / MJPEG

#### Resolution:

5M (2592x1944)

#### Video Format:

RAW

#### Audio Compression:

G.711

#### Power:

Power Consumption: PoE Class 3 (IEEE802.3af) and DC 12V / 12W (built-in heater and IR on)

Power Input: DC 12V / 802.3af PoE

### Features

**Video:**

Image Setting: - Adjustable image size, quality and bit rate  
- Configurable brightness, sharpness, contrast, saturation, white balance and exposure  
- AGC/AWB/AES  
- Back Light Compensation (BLC)  
- Wide Dynamic Range (WDR), Basic WDR (74 dB)  
- 2D Noise Reduction (2DNR)  
Streaming: Up to 2 video streams

**Audio:**

Streaming: 2-way audio  
Input/Output: line input, line output

**Performance****Data Transfer Rate:**

10/100Mbps

**Storage Capacity:**

SD/MicroSD memory card of up to 64GB

**Frame Rate:**

15 fps at 2592 x 1944; 15 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320x240

**Minimum illumination:**

Color: 0.1 lux at F1.8  
B/W: 0 lux (IR LED on)

**Environment****Temperature (°C):**

Operating: -40°C ~ 50°C

**Humidity (Non-condensing):**

Operating: 10% ~ 85%

**Physical Specifications****Dimensions (W x D x H mm):**

122 x 240 x 101 mm

**Weight (g):**

2390 g

**Enclosure:**

Weather proof IP67-rated housing  
Vandal proof IK10-rated

**Others****Approval and Compliance:**

CE, FCC, ONVIF, IP67, IK10, NEMA 4X

**Deployment:**


Wall Mount

**Operation Systems:**

Microsoft Windows 8/7/Vista/XP



## Diagrama

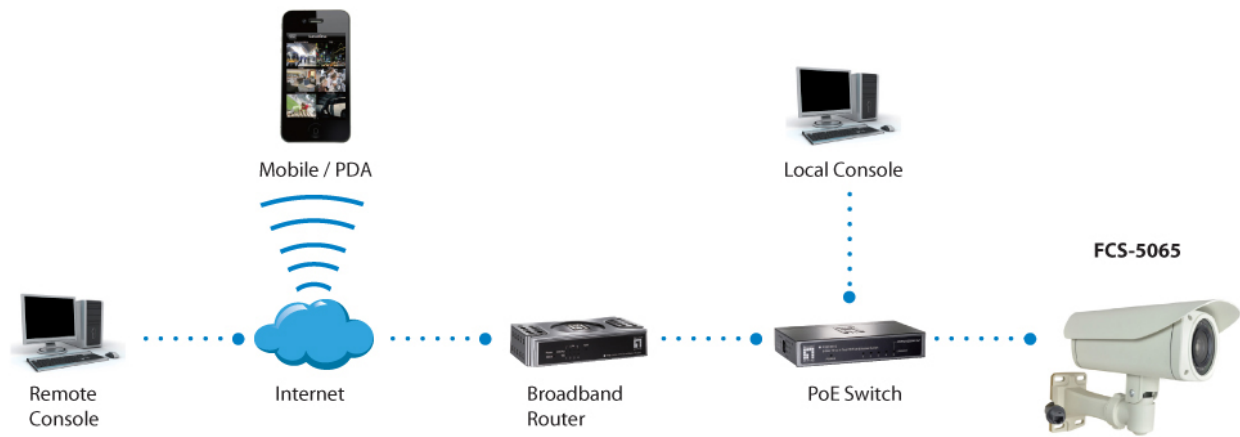

---

## Order Information

FCS-5065

---

## Package Contents

FCS-5065  
Bracket  
Mounting Kit  
Screw Kit  
Quick Installation Guide  
Resource CD (User Manual, Utility, QIG)

---

## Accesorios



**CAS-2504**  
Pole Mount



**CAS-3300**  
Ceiling Bracket

No liability or responsibility for any errors or omissions in the content.  
Specifications are subject to change without notice.  
All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.